

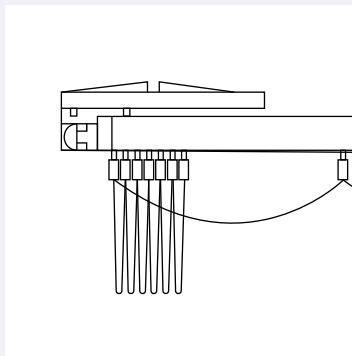



# RAIL CANOPY ES - RETRACTABLE SLIDE-IN-RAIL CANOPY



## Slide-on-Rail: Wheel Carrier

- Tight Stack (when retracted)
- Capability of electrical motion and remote control.

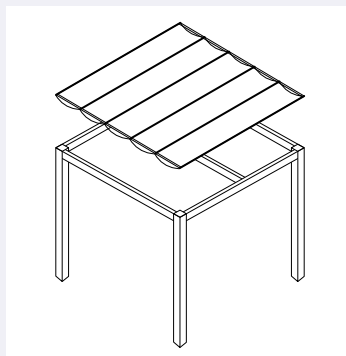


## Install on Existing Structure

- Can also be used under existing structures and pergolas.
- TDSC to Provide Post and Frame Structure (Optional)



## Custom Hardware & Fabric

- Powder Coated Aluminum Hardware
- Variety of Sun Shade Fabrics

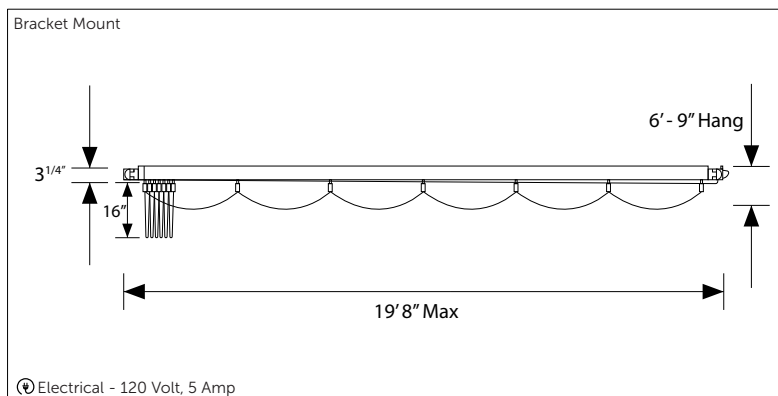

## 9 Standard Colors



## Many Fabric Options



# SLIDE-IN-RAIL: WHEEL CARRIER



## Key Features:

- Tight Stack (when retracted)
- Capability of electrical motion and remote control

The "slide on rail" carrier is a wheeled system designed to smoothly transition the canopy from its fully expanded state to a fully retracted position. When the canopy is retracted, a compact stack design is employed to prevent any adverse weather conditions from entering.

# INSTALL ON EXISTING STRUCTURE



## Key Features:

- Can also be used under existing structures and pergolas
- TDSC to provide post and frame structure (Optional if needed)

Max width/Length: 19' 8"

The Leaf Sky canopy is versatile and can be utilized beneath pre-existing structures and pergolas. If necessary, we offer the option to provide posts and frame structures to support the canopy on existing structures.

# CUSTOM HARDWARE AND FABRIC




## Key Features:

- Powder coated aluminum hardware.
- Variety of Sun Shade Fabrics


The Leaf Sky canopy can be completely tailored to complement the style of your home and patio. We offer the option to customize the aluminum hardware with a powder coat finish, and we provide a diverse selection of fabrics for you to choose from.

# SPECIFICATIONS

Maximum width 19' 8"

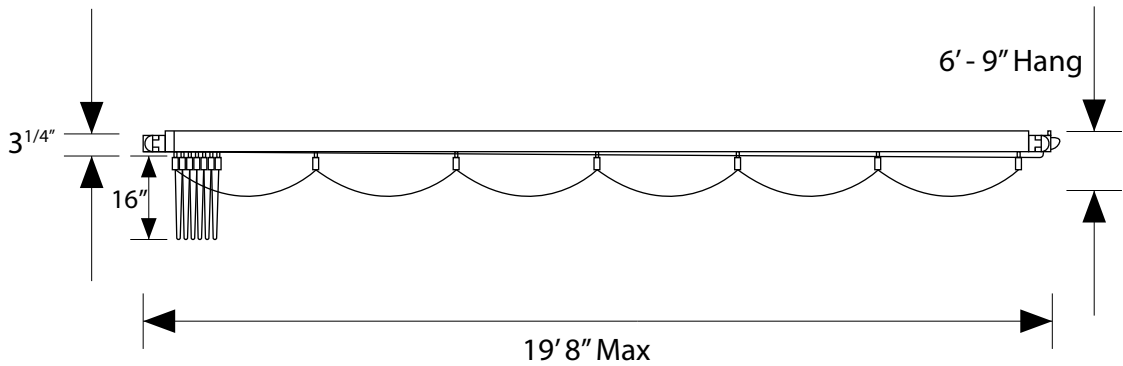

Bracket Mount

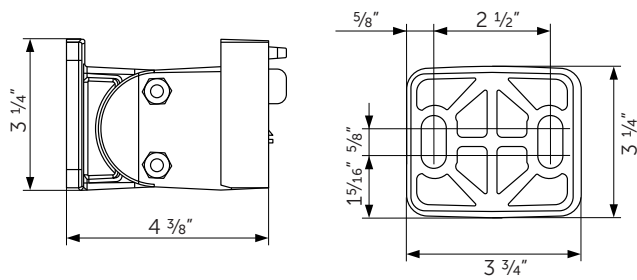

Ⓢ Electrical - 120 Volt, 5 Amp

| Projection | Width |    |    |     |     |     |     |     |     |     |     |     |     | Swag # |       |       |
|------------|-------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------|-------|-------|
|            | Proj. | 8' | 9' | 10' | 11' | 12' | 13' | 14' | 15' | 16' | 17' | 18' | 19' | 20'    | Proj. | Count |
|            | 8'    |    |    |     |     |     |     |     |     |     |     |     |     |        | 8'    | 5     |
|            | 9'    |    |    |     |     |     |     |     |     |     |     |     |     |        | 9'    | 5     |
|            | 10'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 10'   | 6     |
|            | 11'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 11'   | 6     |
|            | 12'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 12'   | 7     |
|            | 13'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 13'   | 8     |
|            | 14'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 14'   | 8     |
|            | 15'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 15'   | 9     |
|            | 16'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 16'   | 9     |
|            | 17'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 17'   | 10    |
|            | 18'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 18'   | 10    |
|            | 19'   |    |    |     |     |     |     |     |     |     |     |     |     |        | 19'   | 11    |
| 20'        |       |    |    |     |     |     |     |     |     |     |     |     |     | 20'    | 11    |       |

# OPERATION PARAMETERS



## OPERATION

The Customer understands that excessive and extraordinary weather conditions may cause damage to the product, the product may not perform optimally or may not function at all. Care should be taken at all times by the owner. Always retract the shading product when not in use. TDSC does not take any responsibility for personal, or property damage caused by weather or improper use and handling.



## OPERATION PARAMETERS



**SUN:** Canopies are only intended for sunshade.



**RAIN:** Canopies are not intended for rain protection



**WIND:** The maximum wind capacity for canopies is 30 mph. Winds stronger than this, may cause damage to the product. Motorized cable canopies are very wind sensitive, and therefore require extra care to prevent damage.



**SNOW:** The above mentioned products are not intended to hold snow. Snow or extreme weather of any kind may damage the product. Product should be retracted during all snowfall.



**TEMPERATURE:** Do not operate the canopy in temperatures below 32 degrees.



**HAIL:** Hail can damage the canopy. Hail Damage is not covered by warranty.



**OBSTRUCTIONS:** Objects such as sticks, branches and debris may impede travel and can damage or stain the fabric. Always use caution.

\* The above weather conditions are manufacturer recommendations only.



# FINISHING

## Hardware Color

Color Name

Color Code



## Fabric Color

Color

Color Code



## Motorized Drop Shade

☐

Yes

☐

No

Color

