

ORIZZONTI - CABLE GUIDED PERGOLA COVER



Shade



30mph



No Snow




15° Pitch



Coverage System

- Suitable for any type of structure; pergolas, skylights, & terraces
- Unlimited design capabilities.

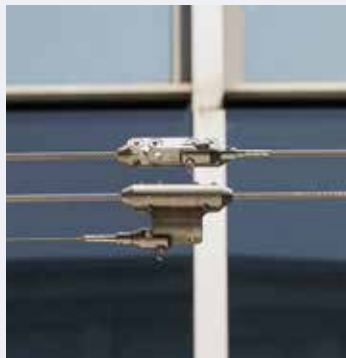


Cable Guided Roll

- Prevents fabric from swaying in the wind.
- Motorized extend/retract operation.



Traction Kit

- Guarantee exceptional fabric tension.
- Gas pistons situated inside the hem bar.

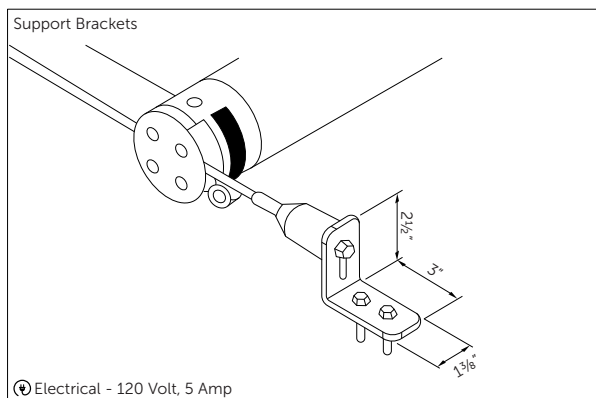

2 Standard Colors



Many Fabric Options



THE DENVER SHADE COMPANY

940 Jason Street, Suite 3
Denver, CO 80223

P: 303.517.1994
W: denvershadecompany.com

COVERAGE SYSTEM




Key Features:

- Design allows versatile movement of the fabric in any direction
- Suitable for outdoor use, making it ideal for pergolas.

Suitable for any type of structure; an elegant motorized blind perfect for pergolas, skylights, and large terraces.

CABLE GUIDED ROLL

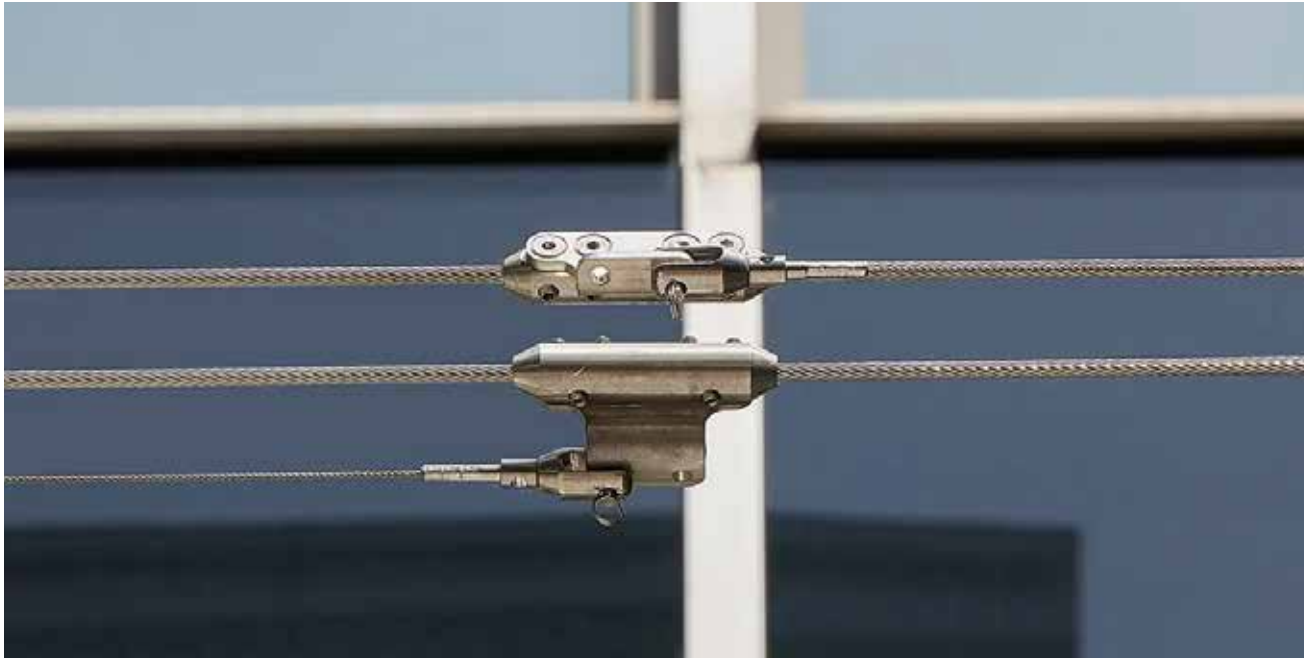

Key Features:

- Prevents fabric from “swaying” in the wind

With this system, you can rest assured that your patio area will remain clean and comfortable, as it helps prevent fabric swaying during high winds, keeping it in place



TRACTION KIT




Key Features:

- Guarantees strong fabric tension for outdoor use.
- Uses gas pistons to counteract wind force.

The traction kit is an exclusive forced traction mechanism designed to guarantee exceptional fabric tension, suitable for outdoor applications. The system efficiently contrasts the force of the wind using the controlled energy of the gas pistons situated inside the round hem bar.

SPECIFICATIONS

Support Brackets

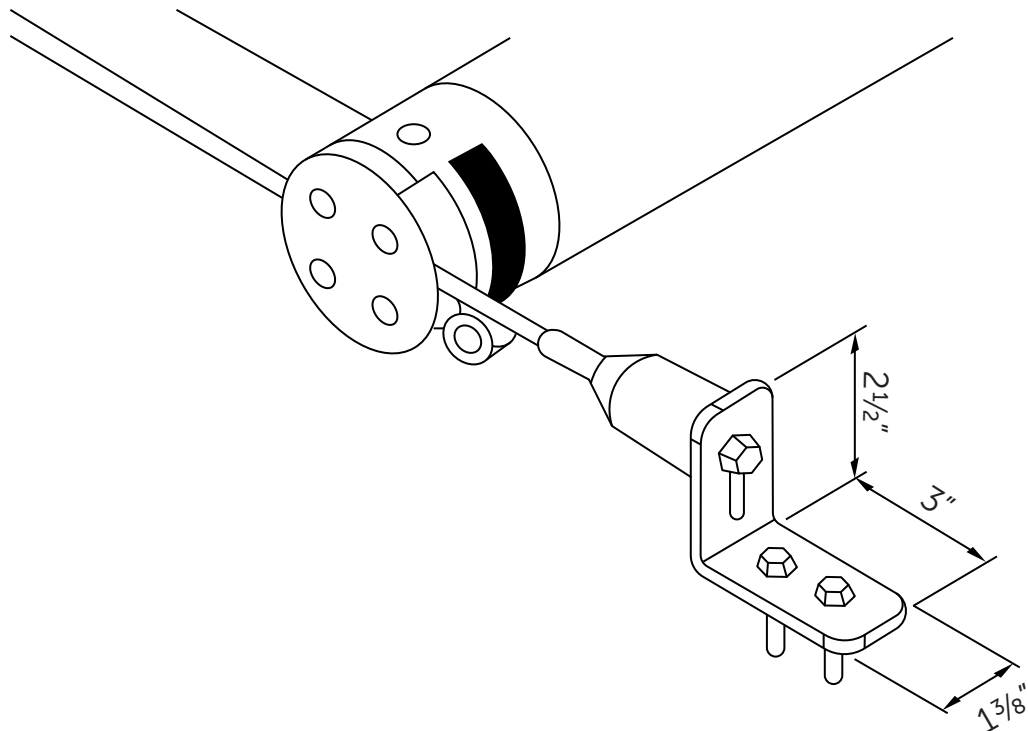

⚡ Electrical - 120 Volt, 5 Amp

		Width																					
Height		3'11"	4'2"	4'6"	4'10"	5'2"	5'6"	5'10"	6'2"	6'6"	6'10"	7'2"	7'6"	7'10"	8'2"	8'6"	8'10"	9'2"	9'6"	9'10"	10'2"	10'6"	
	11'1"																						
	16'4"																						

OPERATION PARAMETERS



OPERATION

The Customer understands that excessive and extraordinary weather conditions may cause damage to the product, the product may not perform optimally or may not function at all. Care should be taken at all times by the owner. Always retract the shading product when not in use. TDSC does not take any responsibility for personal, or property damage caused by weather or improper use and handling.



OPERATION PARAMETERS



SUN: The pergola cover can be used for sunshade.



RAIN: The pergola cover manufacturer warranty for rain protection applies only when the pitch is set to 15° or more. Any pitch less than 15 degrees is not suitable for full capacity rain protection. Operate with caution. Rain can drip behind the awning, fabric seams, edge of fabric, and around the front bar.



WIND: Pergola covers are under constant tension.

WIND RATING: 30 mph. The pergola cover must be retracted in wind exceeding this rating.



SNOW: The pergola cover is not intended to hold snow – Retract the pergola cover during all snow fall. Snow accumulation will damage the pergola cover.



TEMPERATURE: Do not operate the awning in temperatures below 40°F. **Motors and other components may not work in temperatures below 40°F.*



OPERATION PARAMETERS



OPERATION PARAMETERS (*CONTINUED*)



HAIL: The pergola cover should be retracted during a hail storm. Hail damage is not covered by warranty.



OBSTRUCTIONS: Debris like sap, insects, bird poop, leaves, pine needles, sticks, branches or other objects can damage or stain the fabric. Take care when retracting. Debris rolled inside can cause irregular rolling, and possible fabric damage. Always use caution.

* The above weather conditions are manufacturer recommendations only.



FINISHING

Hardware Color

Color

Color Code



Screen Fabric Color

Fabric Type

Color Code

