VZ800 ES - PERGOLA COVER XL
















Multiple Applications

- Standard mount for sun protection.
- Pitch mount option for added rain protection




Full Cassette System


- Clean streamlined appearance.
- With a closed box, the fabric will be effectively protected.




Zippered Fabric

- Strong durable material.
- Spring-tension system.





(Electrical - 120 Volt, 5 Amp



Shaded Area: Width up to 13' 1" per fabric section* (Unlimited width when coupled) Projection up to 19' 8"

9 Standard Colors




Many Fabric Options





MULTIPLE APPLICATIONS

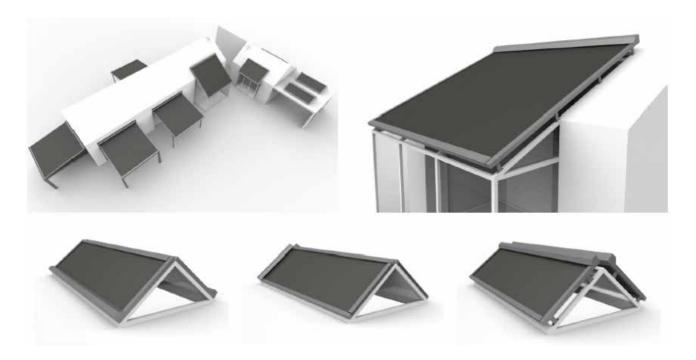

Key Features:

- Ingenious design allows versatile movement of the fabric in any direction
- Suitable for indoor use, making it ideal for skylights and roof lights.

The innovative design facilitates versatile fabric movement, allowing for seamless adjustment in various directions, including bottom to top, top to bottom, left to right, or right to left. This sunblind exhibits adaptability for indoor use, making it particularly well-suited for skylights and roof lights.

FULL CASSETTE SYSTEM



Key Features:

- Protects fabric from weather damage
- Prevents fabric from fading
- Prevents insect and bird damage
- Awning arms retract inside cassette

The full cassette design provides effective protection against diverse weather conditions, ensuring durability and optimal performance.

ZIPPERED FABRIC



Key Features:


- Ultra-taut fabric with innovative zip system.
- Concealed stainless steel spring in guide rails for durability.
- Long-lasting fabric tautness.
- Exceptional wind resistance up to 85 mph.

This model boasts an ultra-taut fabric featuring an innovative zip system and concealed stainless steel springs in the guide rails, ensuring durability and long-lasting tautness.

SPECIFICATIONS


Technical Possibilities

SINGLE Type nr.1 19 8 13' 1"





*COUPLED UNLIMITED WIDTHS

Pergola Awning *Mounted above slat panel roof. (Optional)

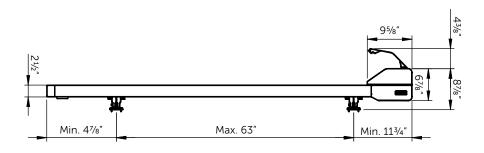


Side Channels





(*) Electrical - 120 Volt, 5 Amp (Placed on left or right end.)

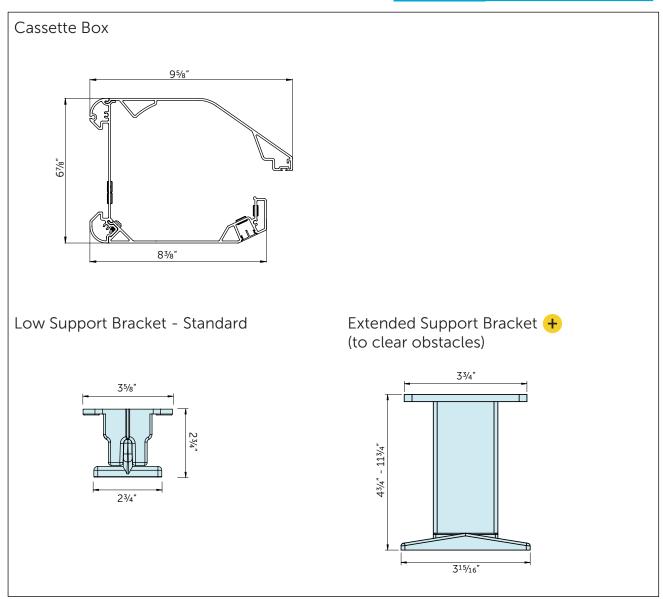

Width

| | Feet | 5′ | 6' | 7′ | 8′ | 9′ | 10′ | 11' | 12' | 13′ 1″ |
|--|-------|----|----|----|----|----|-----|-----|-----|--------|
| | 3'4" | | | | | | | | | |
| | 4'11" | | | | | | | | | |
| | 6'6" | | | | | | | | | |
| | 8'2" | | | | | | | | | |
| | 9'10" | | | | | | | | | |
| | 11'5" | | | | | | | | | |
| | 13'1" | | | | | | | | | |
| | 14'9" | | | | | | | | | |
| | 16'4" | | | | | | | | | |
| | 18' | | | | | | | | | |
| | 19'8" | | | | | | | | | |

[•] Max Width on a 1 field system is 9' 10"



[•] Max Width on a coupled system is 13' for each field

OPERATION PARAMETERS



OPERATION

The Customer understands that excessive and extraordinary weather conditions may cause damage to the product, the product may not perform optimally or may not function at all. Care should be taken at all times by the owner. Always retract the shading product when not in use. TDSC does not take any responsibility for personal, or property damage caused by weather or improper use and handling.





OPERATION PARAMETERS



SUN: The pergola cover can be used for sunshade.



RAIN: The pergola cover manufacturer warranty for rain protection applies only when the pitch is set to 15° or more. Any pitch less than 15 degrees is not suitable for full capacity rain protection. Operate with caution. Rain can drip behind the awning, fabric seams, edge of fabric, and around the front bar.



WIND: Pergola covers are under constant tension.

WIND RATING: 30 mph. The pergola cover must be retracted in wind exceeding this rating.



SNOW: The pergola cover is not intended to hold snow – Retract the pergola cover during all snow fall. Snow accumulation will damage the pergola cover.



TEMPERATURE: Do not operate the awning in temperatures below 40°F. *Motors and other components may not work in temperatures below 40°F.



OPERATION PARAMETERS





OPERATION PARAMETERS (CONTINUED)



HAIL: The pergola cover should be retracted during a hail storm. Hail damage is not covered by warranty.



OBSTRUCTIONS: Debris like sap, insects, bird poop, leafs, pine needles, sticks, branches or other objects can damage or stain the fabric. Take care when retracting. Debris rolled inside can cause irregular rolling, and possible fabric damage. Always use caution.

* The above weather conditions are manufacturer recommendations only.

FINISHING

| Frame Color Color Color Code | |
|--|--|
| Solar Screen Fabric Color Fabric Type Color Code | |